


IRIDE - IRIDE TURBO


DESCRIZIONE | DESCRIPTION

Spot LED da incasso per interno ed esterno. Realizzato in acciaio inox AISI316, bronzo o verniciato bianco. Utilizzabile come uplight incassato a terra o come downlight a soffitto.

Built-in swivel LED spot for indoor/outdoor. Made of stainless steel AISI316, bronze or white painted. Available as uplight recessed into the ground or downlight on ceiling.

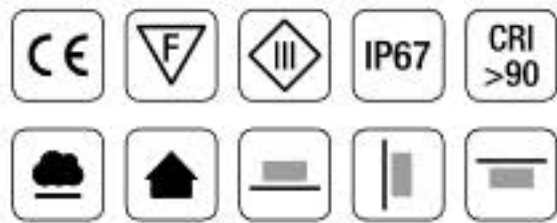

DIMENSIONI | DIMENSION

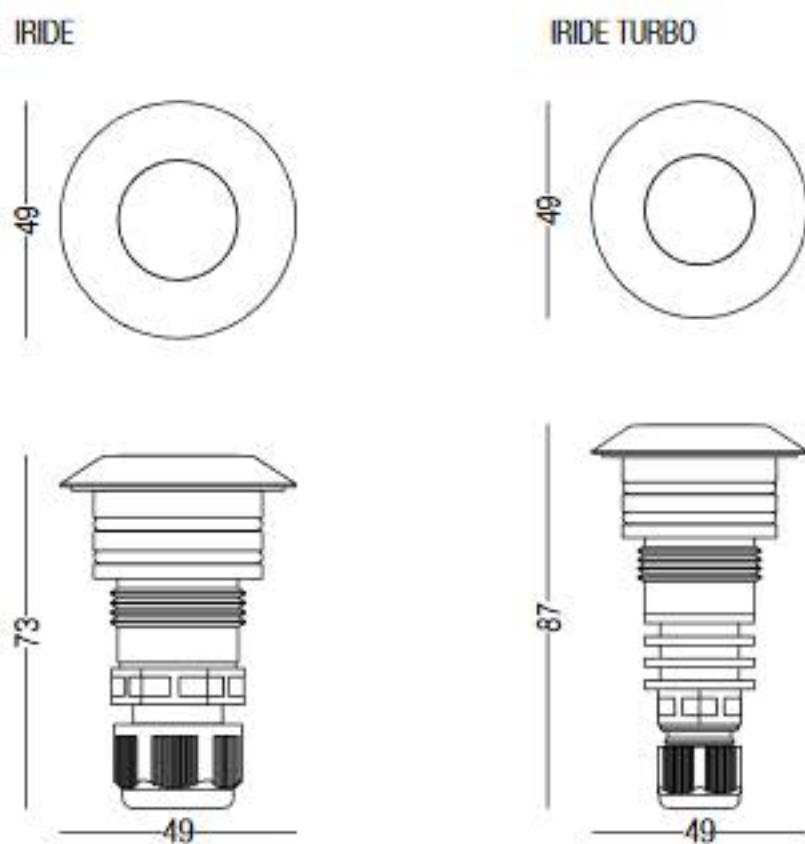

DIAGRAMMI FOTOMETRICI | PHOTOMETRIC DIAGRAM

Diagramma Polare (12°)

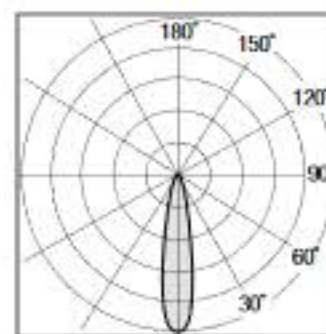


Diagramma Conico (3W)

h(m)	Ø(cm)	(lux)
1	21	2660
1,5	31	1134
2	42	695
2,5	52	475
3	63	303

Diagramma Conico (5W)

h(m)	Ø(cm)	(lux)
1	21	6129
1,5	31	2001
2	42	1578
2,5	52	1011
3	63	707

Diagramma Polare (30°)

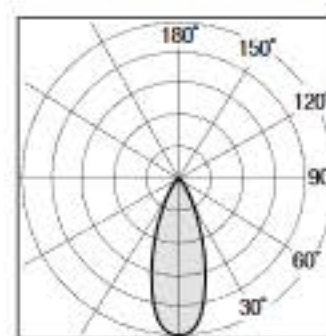



Diagramma Conico (3W)

h(m)	Ø(cm)	(lux)
1	53	646
1,5	80	285
2	107	160
2,5	133	103
3	160	71

Diagramma Conico (5W)

h(m)	Ø(cm)	(lux)
1	53	1642
1,5	80	732
2	107	411
2,5	133	263
3	160	184

SISTEMI DI FISSAGGIO | FIXING SYSTEMS

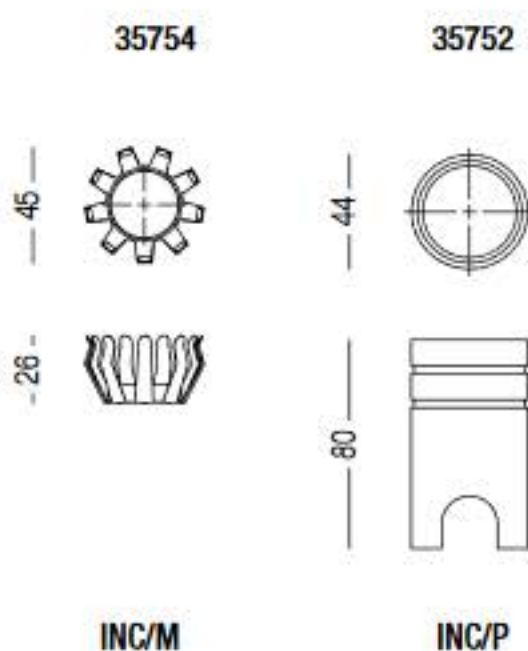

3W 700 mA 3000K 375 lm

Finitura Finishes	Ottica Optic	Codice Code
<input type="checkbox"/> Inox AISI316L Stainless steel	12°	39330-W-12-CC
<input type="checkbox"/> Inox AISI316L Stainless steel	30°	39330-W-30-CC
<input checked="" type="checkbox"/> Bronzo Bronze	12°	39331-W-12-CC
<input checked="" type="checkbox"/> Bronzo Bronze	30°	39331-W-30-CC

3W 24 Vdc 3000K 375 lm

Finitura Finishes	Ottica Optic	Codice Code
<input type="checkbox"/> Inox AISI316L Stainless steel	12°	39330-W-12-L0
<input type="checkbox"/> Inox AISI316L Stainless steel	30°	39330-W-30-L0
<input checked="" type="checkbox"/> Bronzo Bronze	12°	39331-W-12-L0
<input checked="" type="checkbox"/> Bronzo Bronze	30°	39331-W-30-L0

5W 350 mA 3000K 556 lm

Finitura Finishes	Ottica Optic	Codice Code
<input type="checkbox"/> Inox AISI316L Stainless steel	12°	39455-W-12-CC
<input type="checkbox"/> Inox AISI316L Stainless steel	30°	39455-W-30-CC
<input checked="" type="checkbox"/> Bronzo Bronze	12°	39456-W-12-CC
<input checked="" type="checkbox"/> Bronzo Bronze	30°	39456-W-30-CC

5W 24 Vdc 3000K 556 lm

Finitura Finishes	Ottica Optic	Codice Code
<input type="checkbox"/> Inox AISI316L Stainless steel	12°	39455-W-12-L0
<input type="checkbox"/> Inox AISI316L Stainless steel	30°	39455-W-30-L0
<input checked="" type="checkbox"/> Bronzo Bronze	12°	39456-W-12-L0
<input checked="" type="checkbox"/> Bronzo Bronze	30°	39456-W-30-L0

Fissaggio Fixing	Codice Code
Molla per pannello >6mm Spring for panel >6mm	35754
Cassaforma incasso a terra Ground Recessed box	35752
Cassaforma pannello <6mm Box for panel <6mm	35864
Cassaforma incasso carrabile Carriageable recessed box	35753

DISPONIBILE SU RICHIESTA | AVAILABLE UPON REQUEST

Finitura Finishes	Colore luce Color Temperature	Dimmerazione Dimmeration
RAL	2700K 4000K	DALI PUSH 1..10V