

FILUM R



Descrizione del prodotto / Product description

Incasso LED per interni.
Corpo lampada in alluminio o rame
tornito da lastra.

Dissipatore posteriore in estruso di
alluminio e molle in filo di acciaio
armonico.

Schermo frontale in PMMA
microprismato per ottica diffusa 70°.
Schermo frontale in PMMA
trasparente per ottiche spot.

Sorgente COB LED ad alta resa
CRI>90.

Fornito con connettore IP20.

Recessed LED for indoor.

Lamp body made of turned
aluminum or copper.

Rear heat-sink made of extruded
aluminum and spring made of
harmonic steel wire.

Micro-prismatic screen made of
clear PMMA for 70° optic.

Polycarbonate spot optics made of
clear PMMA.


Upper screen made of turned clear
PMMA.

COB LED source with high resolution
CRI>90.

Supplied with IP20 connector.

Alimentatore ON/OFF incluso.

ON/OFF driver included.

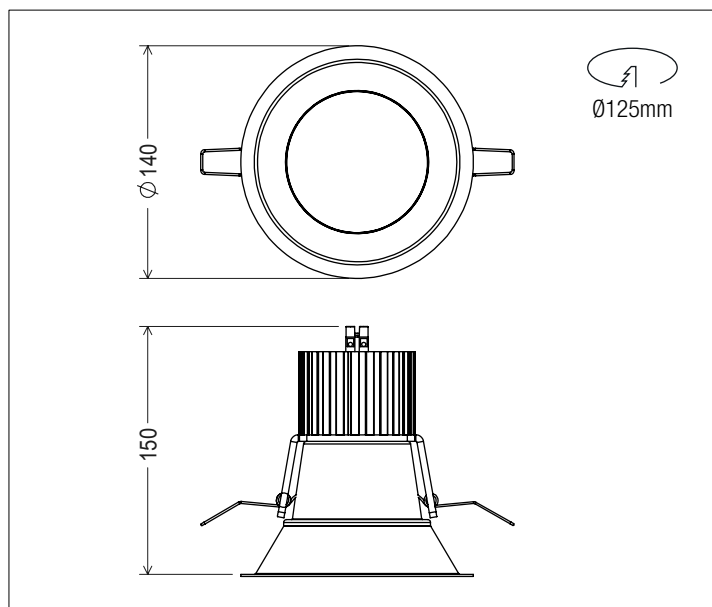

Dati tecnici | Technical Info

* su richiesta / on requests

Finiture Finishes	○ Bianco White
	● Nero Black
	● Verniciato Oro 522 Gold 522 Paintings
	● Verniciati RAL RAL Paintings*
Potenza Power	25W
Corrente Current	700mA
Tensione Voltage	34 ~ 36V
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	3000lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h
Temperature di esercizio Operating temperature	-20° ~ 45°

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe III
IP40	Indice di Protezione IP40

Temperatura di Colore Color Temperature

2700K - CRI 92 *
3000K - CRI 92
4000K - CRI 92 *


Ottiche Optics

	24° - Medium Beam *
	36° - Flood Beam *
	55° - Wide Flood Beam *
	70° - Very Wide Flood Beam

Sistemi di Controllo Control System

	On / Off (remoto incluso / remote included)
PUSH	Push * (remoto escluso / remote excluded)
1-10V	1-10V , 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)

Dati Fotometrici | Photometric Specification

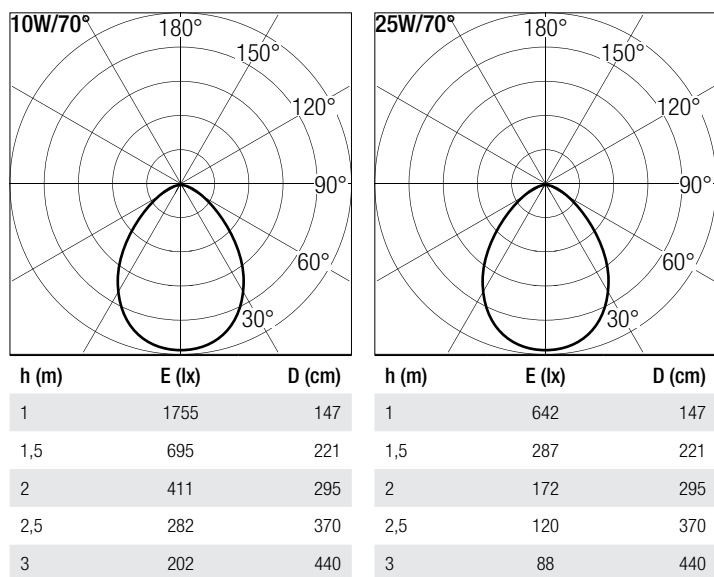

Alimentatori | Led Driver

potenza / power	corrente / current	tensione / voltage	IP	n. prodotti
-----------------	--------------------	--------------------	----	-------------

incluso / included