

UP 0 DOWN 65



Descrizione del prodotto / Product description

Plafone LED per interni ed esterni.
Corpo dissipante interno in alluminio anodizzato nero e corpo esterno in ottone naturale tornito.
Optica ad emissione spot 20°, 30° o 50° in policarbonato.
Schermo superiore tornito in PMMA trasparente.
Pressacavo interno M12x1,5 IP68.
Sorgente COB LED CRI ≥90.
Cavo di collegamento 2x0,5mm2, L. 200mm.
Fornito con sistema di connessione rapida termoretraibile (vedi istruzioni di montaggio).

*Ceiling LED lamp for indoor / outdoor.
Internal body made of black anodized aluminum and external body made off turned brass.
Spot optics 20°, 30° or 50° made of polycarbonate.
Upper screen made of turned clear PMMA.
Internal co-printed cable gland M12x1.5 IP68.
COB LED source CRI ≥90.
Connection cable 2x0,5mm2, L. 200mm.
Supplied with heat shrink fast connection system (see assembly instructions)*


Dati tecnici / Technical Info

* su richiesta / on requests

Finiture / Finishes

- Rame Naturale | Natural Copper
- Ottone Naturale | Natural Brass
- Grigio Grafite | Graphite Grey
- Cemento | Concrete
- Corten Scuro | Dark Corten
- Verniciato Bronzo | Bronze Painted
- Verniciati RAL | RAL Paintings*

Potenza Power	8W
Corrente Current	-
Tensione Voltage	220 ~ 240Vac
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	885lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h
Temperature di esercizio Operating temperature	-20° ~ 45°

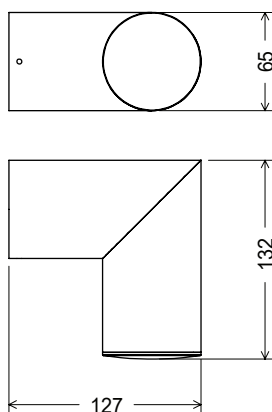

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe II
	Idoneo al montaggio su superfici infiammabili
	Indice di Protezione IP65

Temperatura di Colore Color Temperature

2700K - CRI 92 *
3000K - CRI 92
4000K - CRI 92 *


Ottiche Optics

	20° - Medium Beam
	30° - Flood Beam
	50° - Wide Flood Beam

Sistemi di Controllo Control System


	On / Off (a bordo / on board)
	Push * (remoto escluso / remote excluded)
	1-10V , 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)
	Casambi Bluetooth * (remoto escluso / remote excluded)

Dati Fotometrici | Photometric Specification

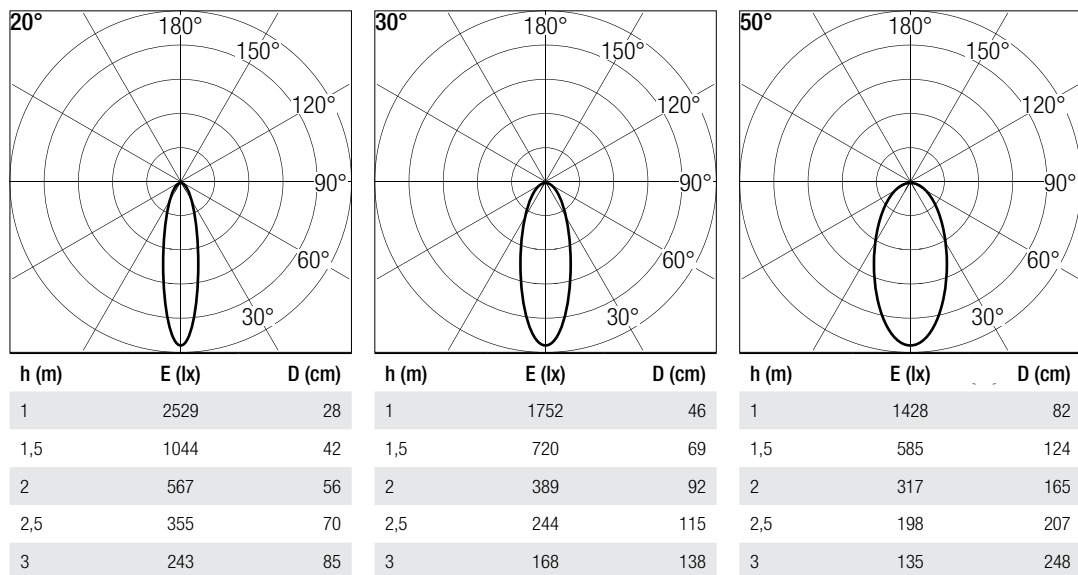

Accessori | Accessories

Spina di fissaggio / Fixing Plug



Spinaper fissaggio a parete/soffitto.
(Ø61x20mm)

Plastic Plug for Wall/ceiling fixing
(Ø61x20mm)