

# BOOMER 14 PLAFONE


**341PA01H11**



## Descrizione del prodotto / Product description

Proiettore LED da interno con fissaggio a plafone.  
Ideale per l'illuminazione d'accento.  
Corpo realizzato da tornitura di alluminio con trattamento superficiale di verniciatura o galvanica rame.  
Optica ad emissione spot e schermo in PMMA trasparente serigrafato.  
Sorgente COB LED ad alta resa ed alimentatore ON/OFF a bordo.

LED projector for indoor with ceiling box system.  
Ideal for accent light.  
Body made of turning aluminum with painted or copper finish.  
Spot optics and silk-screened screen made of clear PMMA.  
COB LED source with ON/OFF driver on-board.

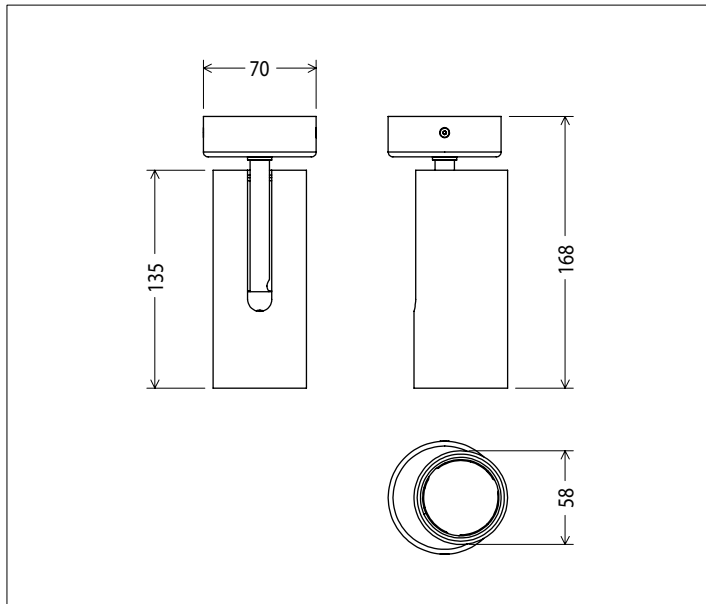

## Dati tecnici / Technical Info

\* su richiesta / on requests

|                                                     |                                   |
|-----------------------------------------------------|-----------------------------------|
| Finiture / Finishes                                 | ○ 4001 Bianco   White             |
|                                                     | ● 4002 Nero   Black               |
|                                                     | ● 4010 Oro   Gold                 |
|                                                     | ● 4011 Bronzo   Bronze            |
|                                                     | ● Verniciati RAL   RAL Paintings* |
| Potenza   Power                                     | 14W                               |
| Corrente   Current                                  | -                                 |
| Tensione   Voltage                                  | 220/240Vac                        |
| Tolleranza cromatica   Chromatic tolerance          | 3 SDCM                            |
| Flusso luminoso   Luminous Flux                     | 1500lm                            |
| Mantenimento del flusso luminoso   Flux Maintenance | ≥50.000h                          |
| Temperature di esercizio   Operating temperature    | -20° ~ 45°                        |

## Simbologia tecnica Technical informations

|             |                              |
|-------------|------------------------------|
|             | Conforme alle direttive CE   |
|             | Conforme alle normative RoHS |
|             | Classe I                     |
| <b>IP20</b> | Indice di Protezione IP20    |

## Temperatura di Colore Color Temperature

|                            |
|----------------------------|
| <b>9027</b> - 2700K CRI 92 |
| <b>9030</b> - 3000K CRI 92 |
| <b>9040</b> - 4000K CRI 92 |

## Ottiche Optics


|  |                                   |
|--|-----------------------------------|
|  | <b>M1</b> - 20° (Medium Beam)     |
|  | <b>F1</b> - 30° (Flood Beam)      |
|  | <b>W3</b> - 50° (Wide Flood Beam) |

## Sistemi di Controllo Control System


|              |                                                       |
|--------------|-------------------------------------------------------|
|              | On / Off<br>(a bordo / on board)                      |
| <b>PUSH</b>  | Push *<br>(remoto escluso / remote excluded)          |
| <b>1-10V</b> | 1-10V , 0-10V *<br>(remoto escluso / remote excluded) |
|              | DALI *<br>(remoto escluso / remote excluded)          |

## Creazione Codice | Code construction


**341PA01H11-XXXX-XX-XXXX**

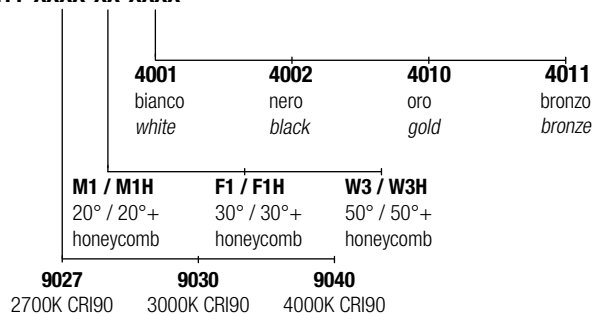


## Dati Fotometrici | Photometric Specification

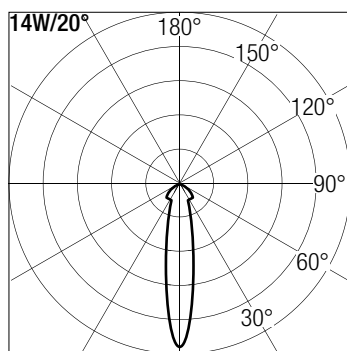

| h (m) | E (lx) | D (cm) |
|-------|--------|--------|
| 1     | 3613   | 28     |
| 1,5   | 1492   | 42     |
| 2     | 810    | 56     |
| 2,5   | 508    | 70     |
| 3     | 348    | 85     |

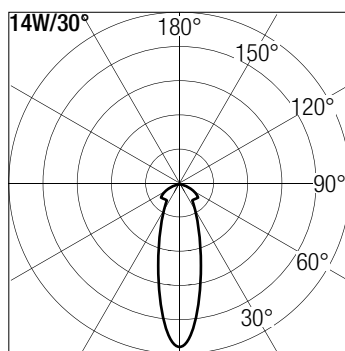


| h (m) | E (lx) | D (cm) |
|-------|--------|--------|
| 1     | 2504   | 46     |
| 1,5   | 1029   | 69     |
| 2     | 557    | 92     |
| 2,5   | 349    | 115    |
| 3     | 240    | 138    |

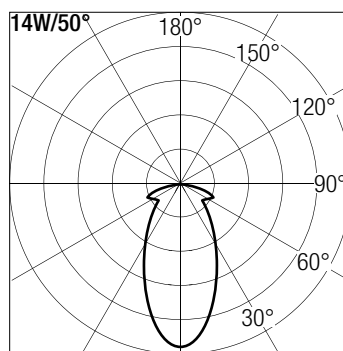

| h (m) | E (lx) | D (cm) |
|-------|--------|--------|
| 1     | 2041   | 82     |
| 1,5   | 836    | 124    |
| 2     | 453    | 165    |
| 2,5   | 284    | 207    |
| 3     | 194    | 248    |

## Accessori | Accessories

### Honeycomb / Honeycomb



Filtro Alveolare anti-abbagliamento.  
(spessore 3mm)

Anti-glare Honey Comb.  
(thickness 3mm)