

BOOMER 25 PLAFONE


341PB01H11



Descrizione del prodotto / Product description

Proiettore LED da interno con fissaggio a binario o plafone. Ideale per l'illuminazione d'accento. Corpo realizzato da tornitura di alluminio con trattamento superficiale di verniciatura o galvanica rame. Ottica ad emissione e schermo in PMMA trasparente serigrafato. Sorgente COB LED ad alta resa ed alimentatore ON/OFF a bordo.

LED projector for indoor with track or ceiling system. Ideal for accent light. Body made of turning aluminum with painted or copper finish. Spot optics and silk-screened screen made of clear PMMA. COB LED source with ON/OFF driver on-board.

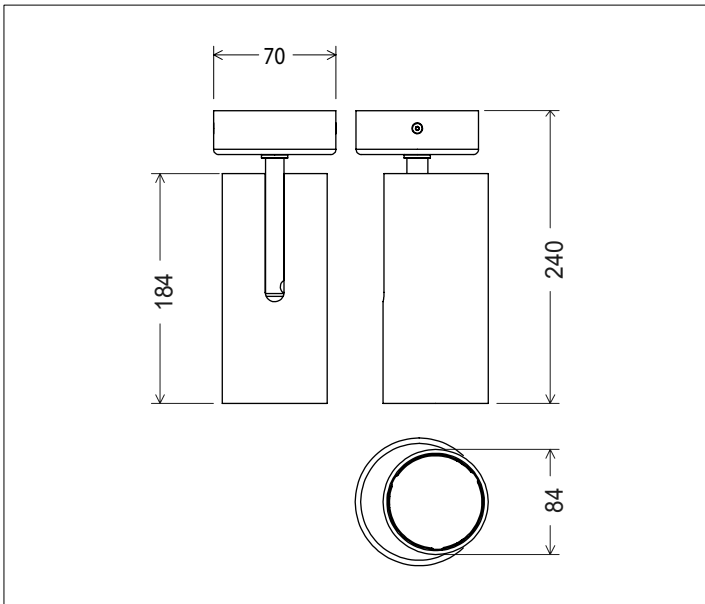

Dati tecnici / Technical Info

* su richiesta / on requests

Finiture / Finishes	○ 4001 Bianco White
	● 4002 Nero Black
	● 4010 Oro Gold
	● 4011 Bronzo Bronze
	● Verniciati RAL RAL Paintings*
Potenza Power	25W
Corrente Current	-
Tensione Voltage	220/240Vac
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	2900lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h
Temperature di esercizio Operating temperature	-20° ~ 45°

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe I
IP20	Indice di Protezione IP20

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics


	M1 - 20° (Medium Beam)
	F1 - 30° (Flood Beam)
	W3 - 50° (Wide Flood Beam)
	W5 - 75° (Very Wide Flood Beam)

Sistemi di Controllo Control System


	On / Off (a bordo / on board)
PUSH	Push * (remoto escluso / remote excluded)
1-10V	1-10V, 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)

Creazione Codice | Code construction


341PB01H11-XXXX-XX-XXXX

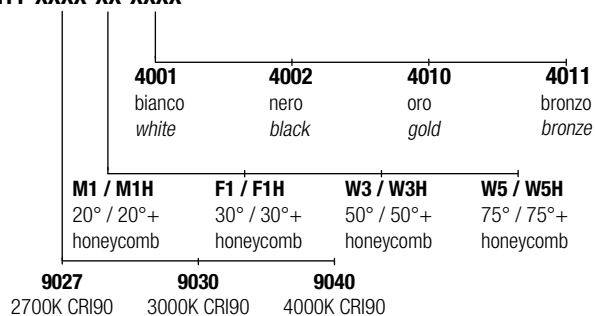


Dati Fotometrici | Photometric Specification

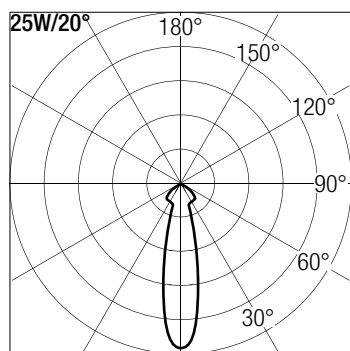


h (m)	E (lx)	D (m)
1	15640	38
1,5	7210	58
2	4390	77
2,5	2530	97
3	1820	116

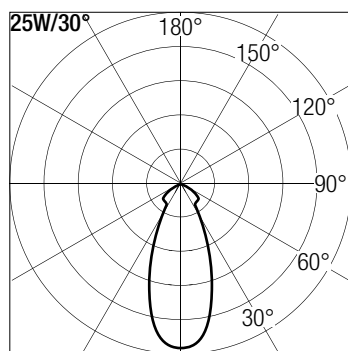

h (m)	E (lx)	D (m)
1	5685	65
1,5	2575	97
2	1436	130
2,5	953	162
3	676	195

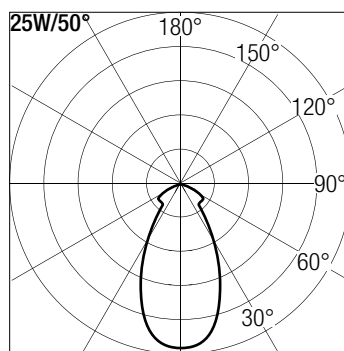


h (m)	E (lx)	D (m)
1	2683	104
1,5	1232	156
2	684	208
2,5	455	260
3	333	312

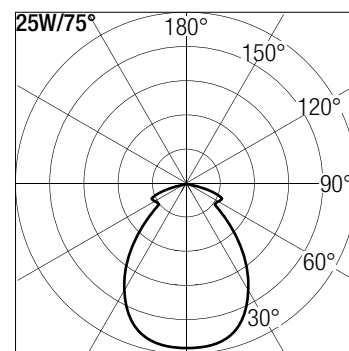

h (m)	E (lx)	D (m)
1	1563	148
1,5	793	221
2	455	296
2,5	305	369
3	226	443

Accessori | Accessories

Honeycomb / Honeycomb



Filtro Alveolare anti-abbagliamento.
(spessore 3mm)

Anti-glare Honey Comb.
(thickness 3mm)