

LAYER


338SA01H11



Descrizione del prodotto / Product description

Applique per interni in alluminio, luce indiretta. Corpo lampada realizzato in alluminio anodizzato o verniciato e ricavato da taglio laser. Il design della lampada è pensato per favorire la dissipazione termica a favore di un implemento dell'efficienza stessa. L'ottica diffusa e il suo orientamento permettono di sfruttare come superficie riflettente la parete di fissaggio del prodotto amplificando la distribuzione luminosa con effetto wall washer. Il prodotto risulta particolarmente adatto per ottenere un clima luminoso diffuso.

Indoor wallLED applique made of aluminum, indirect light. Body lamp made of anodized aluminium or painted obtained from laser cutting. The design of the lamp is designed to promote thermal dissipation in favor of an implementation of efficiency itself. The diffused optics and its orientation make it possible to exploit the fixing wall of the product as a relocated surface by amplifying the luminous distribution with wall washer effect. The product is particularly suitable for a diffused light distribution.

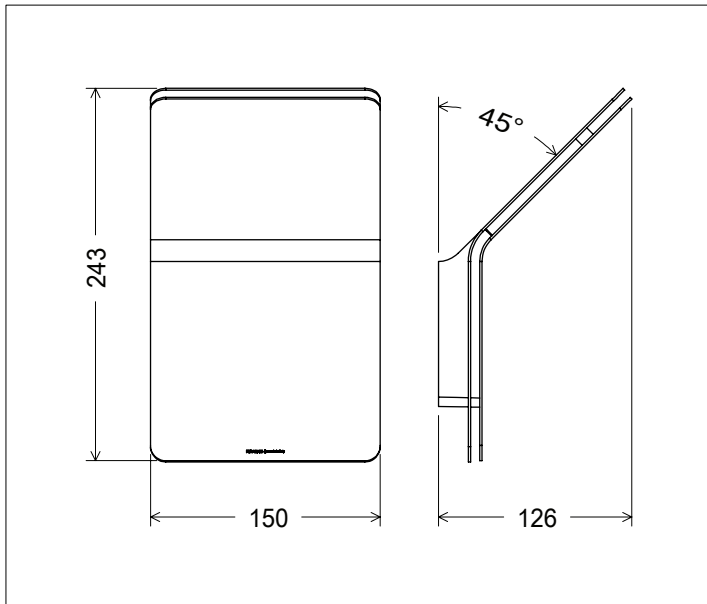

Dati tecnici / Technical Info

* su richiesta / on requests

Finiture / Finishes	○ 4001 Bianco White
	● 4002 Nero Black
	● 4010 Oro Gold
	● 4011 Bronzo Bronze
	○ 4015 Bianco Fiorentino Florentine White
	● 4024 Rosso Mattone Brick Red
	● Verniciati RAL RAL Paintings*
Potenza Power	15W
Corrente Current	-
Tensione Voltage	220 ~ 240Vac
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	1596lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe I
IP40	Indice di Protezione IP40

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics




Sistemi di Controllo Control System


	On / Off (a bordo / on board)
PUSH	Push * (remoto escluso / remote excluded)
1-10V	1-10V , 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)

Creazione Codice | Code construction

338SA01H11-XXXX-XX-XXXX

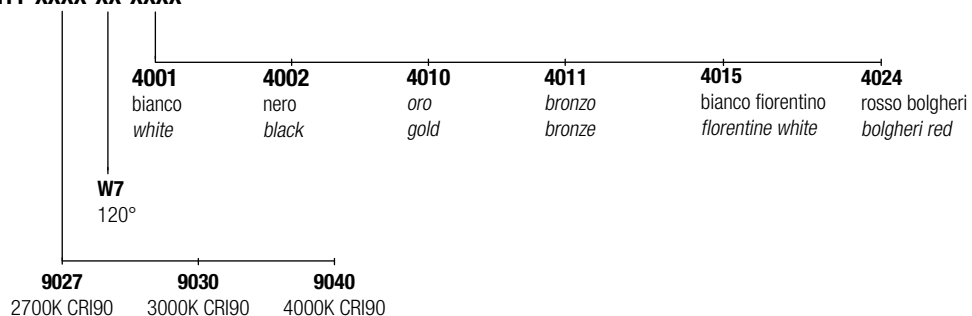

Dati Fotometrici | Photometric Specification

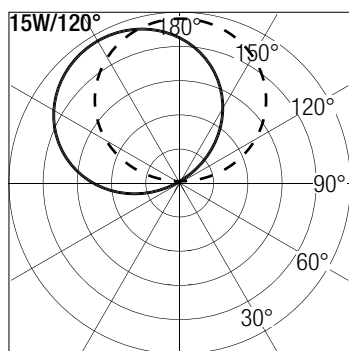

h (m)	E (lx)	R (cm)
-	66	300
-	130	200
-	520	100
-	1840	50
-	6500	25