

LEDDI WALL (TIGE / THREADED ROD)

332RB01C11



Descrizione del prodotto / Product description

Applique LED per interni con braccio flessibile.

Ideale per testa letto e luce da lettura. Testa lampada in alluminio tornito, braccio flessibile in ottone e placca di fissaggio in ottone tornito.

Trattamento superficiale di galvanica Cromo Lucido o Opaco.

Ottica spot 30° in PMMA trasparente. Power LED di potenza ad altissima efficienza CRI ≥90.

Uscita con 2 cavi di collegamento.

Fornito con sistema di connessione a 2 vie (vedi istruzioni di montaggio).

Applique LED for indoor with flexible arm.

Ideal for reading light or bed head.


Lamp head made of turned aluminum, flexible arm made of brass and fixing plate made of turned brass.

Surface treatment of shine or matt Chrome galvanic.

Spot optic 30° made of clear PMMA. Power LED with very high efficiency CRI ≥90.

Uscita con 2 cavi di collegamento.

Fornito con sistema di connessione a 2 vie (vedi istruzioni di montaggio).

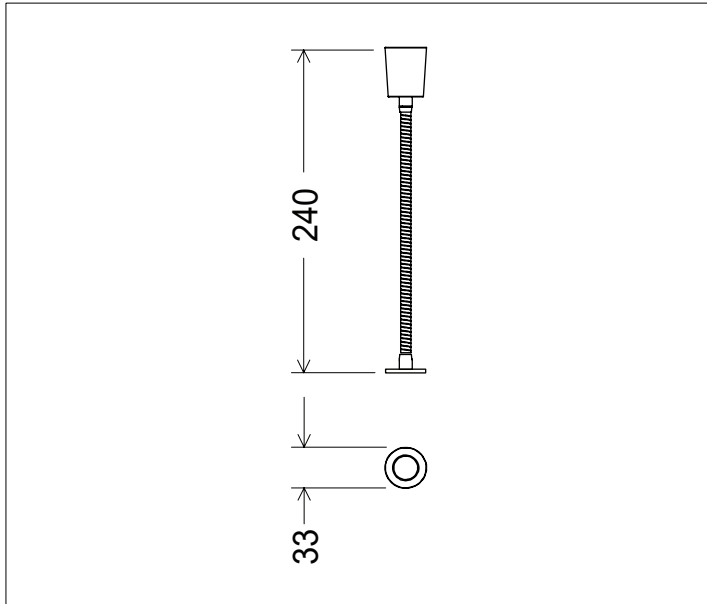

Dati tecnici / Technical Info

* su richiesta / on requests

Finiture / Finishes	○ 4001 Bianco White
	● 4002 Nero Black
	● 4011 Bronzo Bronze
	○ 4015 Bianco Fiorentino Florentine White
	● 4024 Rosso Bolgheri Bolgheri Red
	● 3001 Cromo Lucido Shining Chrome
	● Verniciati RAL RAL Paintings*
Potenza Power	2W
Corrente Current	350mA
Tensione Voltage	2 ~ 3Vdc
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	126lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe III
IP40	Indice di Protezione IP40

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics




F1 - 30° (Medium Beam)

Sistemi di Controllo Control System


	On / Off (remoto escluso / remote excluded)
PUSH	Push * (remoto escluso / remote excluded)
1-10V	1-10V , 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)
	Casambi Bluetooth * (remoto escluso / remote excluded)

Creazione Codice | Code construction

332RB01C11-XXXX-XX-XXXX

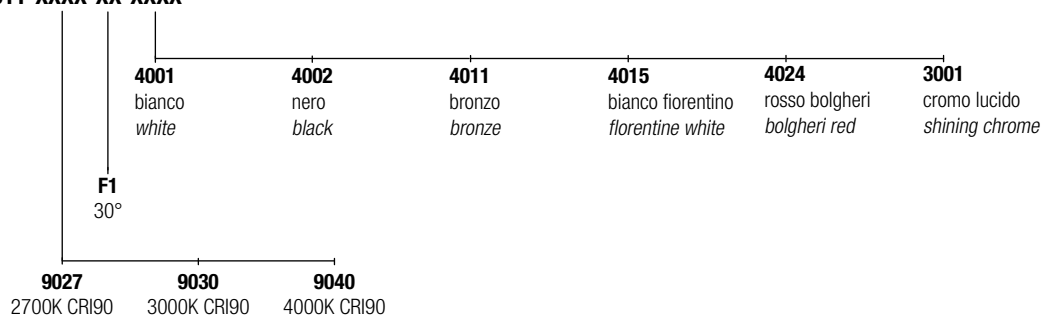


Dati Fotometrici | Photometric Specification

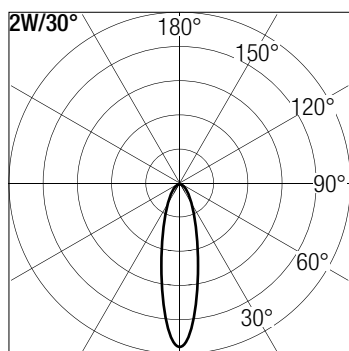

h (m)	E (lx)	D (cm)
1	546	53
1,5	232	80
2	129	107
2,5	81	133
3	48	160

Accessori | Accessories

Sistema Tige / Threaded Rod System



Sistema fissaggio a pannello.
(Ø50mm, foro su pannello Ø15mm)

Panel fixing system.
(Ø50mm ,hole on panel Ø15mm)

Alimentatori | *Led Driver*

Tipo Alim. / Driver Type	potenza / power	corrente / current	dimensioni / dimensions	n. prodotti	IP	codice / code
ON/OFF	6W	350mA	32x22x76mm	1 ~ 3	20	9M101
	10W	350mA	39x22x75mm	1 ~ 5	20	9M107
DALI PUSH 0-10V 1-10V	16W	350mA	22x20x142mm	1 ~ 6	20	9M507/350