

WALKER CC

307SA01C11



Descrizione del prodotto / Product description

Segnapasso LED per interni ed esterni con ottica asimmetrica 80°.

Corpo lampada in pressofusione di Zama, dissipatore interno in alluminio tornito anodizzato nero e lente piano-convessa in PMMA trasparente.

Power LED di potenza ad altissima efficienza CRI ≥90.

Fornito con sistema di connessione (vedi istruzioni di montaggio).

Ideale per l'illuminazione di percorsi e camminamenti.

Footlight LED for indoor and outdoor applications with asymmetric optic 80°.

Body lamp made of die cast Zama, interna heatsink made of black anodized aluminium and lens made of clear PMMA.

Power LED with very high efficiency CRI ≥90.

Supplied with connection system (see assembly instructions).

Ideal for lighting paths and walkways.

Dati tecnici / Technical Info

* su richiesta / on requests

Finiture / Finishes

- **4003** Grafite | Graphite
- **4004** Cemento | Concrete
- **4006** Corten Scuro | Dark Corten
- **4011** Bronzo | Bronze
- **4015** Bianco Fiorentino | Florentine White
- **4024** Rosso Bolgheri | Bolgheri Red
- Verniciati RAL | RAL Paintings*

Potenza | Power 3W

Corrente | Current 700mA

Tensione | Voltage 2 ~ 3V

Tolleranza cromatica | Chromatic tolerance 3 SDCM

Flusso luminoso | Luminous Flux 236lm

Mantenimento del flusso luminoso | Flux Maintenance ≥50.000h

Temperature di esercizio | Operating temperature -20° ~ 45°

Ottiche Optics



W5 - 80° (Asymmetric)

Sistemi di Controllo Control System



On / Off
(remoto escluso / remote excluded)




Push *
(remoto escluso / remote excluded)



1-10V , 0-10V *
(remoto escluso / remote excluded)



DALI *
(remoto escluso / remote excluded)

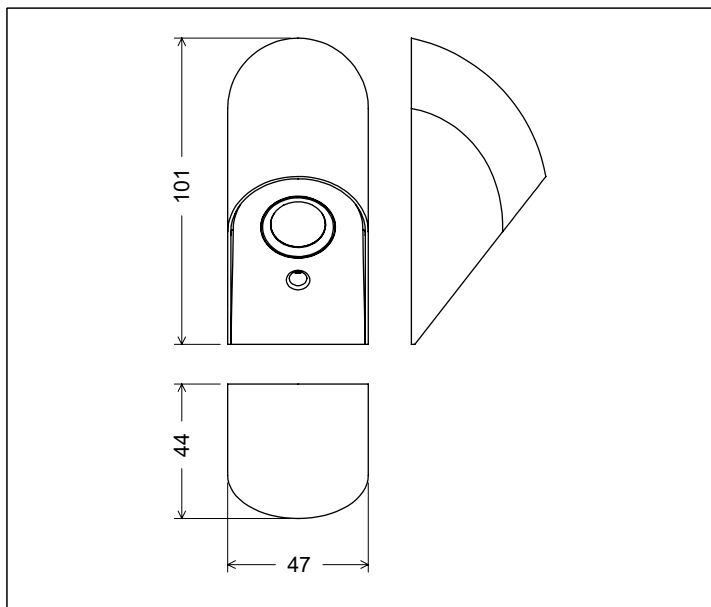

Simbologia tecnica Technical informations



Conforme alle direttive CE



Conforme alle normative RoHS



Classe III



Indice di Protezione IP67



Connettore stagno in dotazione

Temperatura di Colore Color Temperature


9027 - 2700K CRI 92

9030 - 3000K CRI 92


9040 - 4000K CRI 92

Creazione Codice | *Code construction*

307SA01C11-XXXX-XX-XXXX

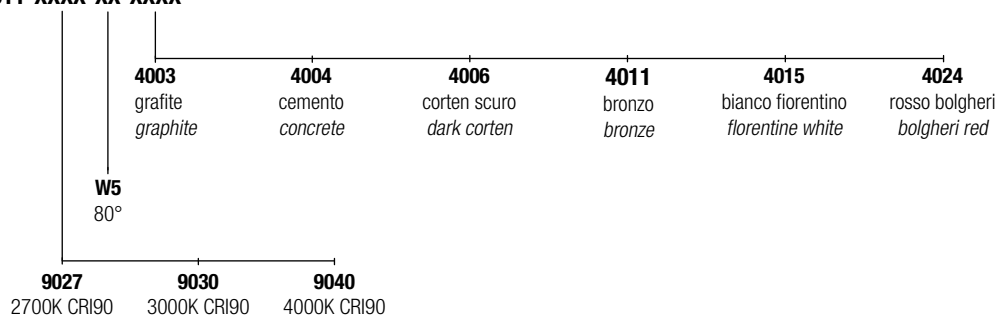

Dati Fotometrici | *Photometric Specification*

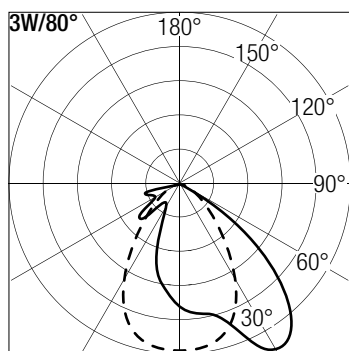

R (m)	E (lx)
0,25	700
0,50	330
1,00	92
1,50	41
2,00	24

Alimentatori | *Led Driver*

Tipo Alim. / Driver Type	potenza / power	corrente / current	dimensioni / dimensions	n. prodotti	IP	codice / code
ON/OFF	10W	700mA	39x22x75mm	1 ~ 3	20	9M109
	14W	700mA	38x25x79mm	1 ~ 5	67	9M203
DALI2	23W	700mA	47x26x111mm	1 ~ 15	67	9M602/700