

LUCCIOLA MICRO ASTA

343PA02C11



Descrizione del prodotto / Product description

Proiettore LED per interni ed esterni .
Ideale per l'illuminazione d'accento o di piccole alberature .

Corpo realizzato da tornitura di alluminio con trattamento superficiale di verniciatura o galvanica rame.

Disponibili varie ottiche in PMMA trasparente.

Power LED di potenza ad altissima efficienza CRI ≥90.

Cavo di collegamento in neoprene. Fornito con sistema di connessione rapida termoretraibile o su richiesta con connettore rapido a due poli IP68 (vedi istruzioni di montaggio).

Ideale per l'installazione multipla direzionabile su asta.

LED projector for indoor / outdoor.

Ideal for accent lighting or small trees.

Body made of turning aluminum with painted or copper finish.

Various available spot optics made of clear PMMA.

Power LED with very high efficiency CRI ≥90.

Neoprene connection cable Supplied with heat shrink fast connection system or on request with rapid IP68 connector (see assembly instructions).

Ideal for installation multiple directional on rod.


Dati tecnici / Technical Info

* su richiesta / on requests

Finiture / Finishes

- **1032** Rame Naturale | Natural Copper
- **4003** Grafite | Graphite
- **4004** Cemento | Concrete
- **4006** Corten Scuro | Dark Corten
- **4008** Verde Scuro | Dark Green
- **4015** Bianco Fiorentino | Florentine White
- **4024** Rosso Bolgheri | Bolgheri Red
- Verniciati RAL | RAL Paintings*

Potenza Power	1,2W
Corrente Current	350mA
Tensione Voltage	2,9Vdc
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	126lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h

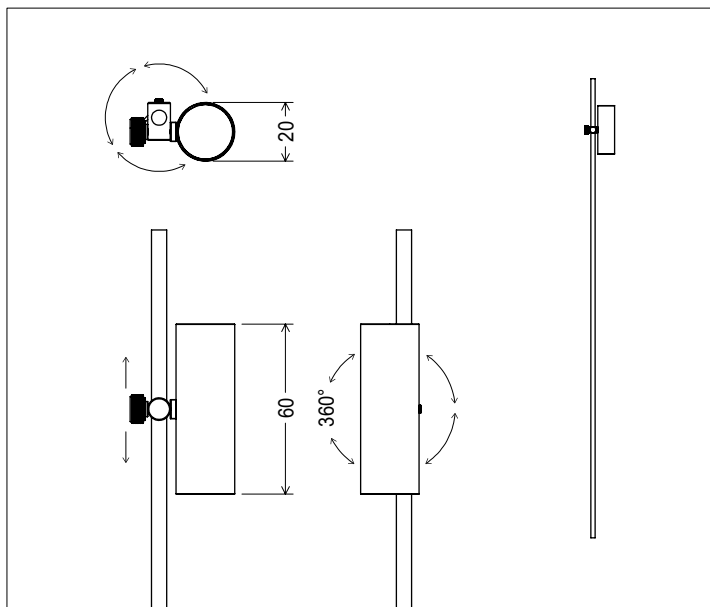

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe III
IP65	Indice di Protezione IP65
	Connettore stagno in dotazione

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics


	M1 - 18°(Medium Beam)
	W1 - 45°(Wide Flood Beam)
	W5 - 80°(Very Wide Flood Beam)

Sistemi di Controllo Control System


	On / Off (remoto escluso / remote excluded)
PUSH	Push * (remoto escluso / remote excluded)
1-10V	1-10V , 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)

Creazione Codice | Code construction


343PA02C11-XXXX-XX-XXXX

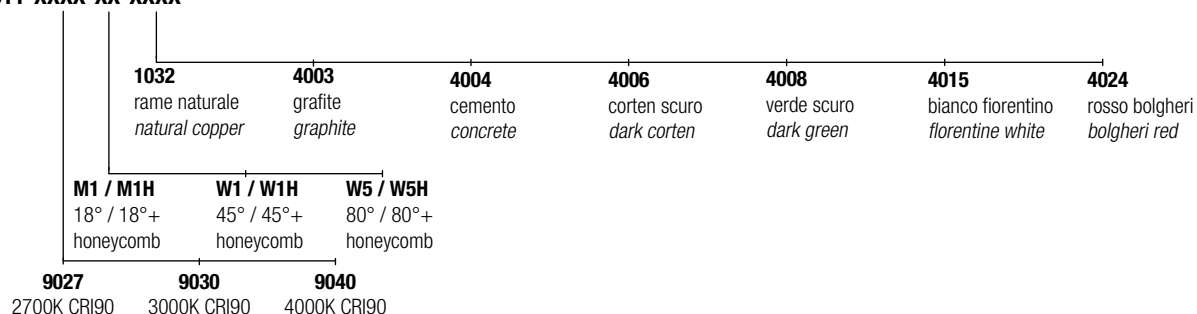

Dati Fotometrici | Photometric Specification

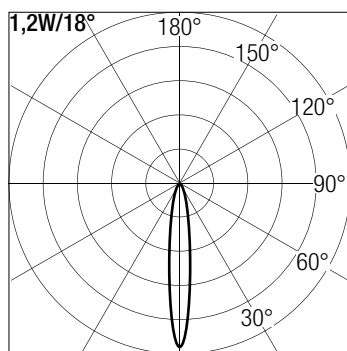


h (m)	E (lx)	D (cm)
1	1015	28
1,5	450	54
2	254	82
2,5	160	107
3	98	159

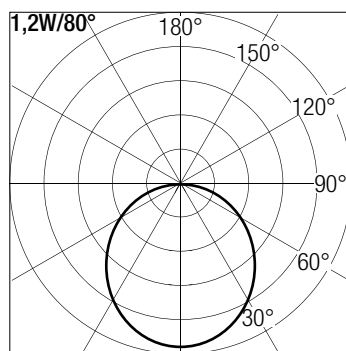

h (m)	E (lx)	D (cm)
1	338	200
1,5	131	300
2	106	400
2,5	67	500
3	48	600

Accessori | Accessories


9C002 - 4002



Picchetto per fissaggio a terra.
(Ø08mm H.810mm)

Spike for ground fixing.
(Ø08mm H.810mm)

THB.391.R4A.R



Connettore lineare IP68 a 4 poli.
ANTICONDENSA (Ø23x89mm)

4 poles linear IP68 connector.
ANTICONDENSATION (Ø23x89mm)

Alimentatori | *Led Driver*

Tipo Alim. / Driver Type	potenza / power	corrente / current	dimensioni / dimensions	n. prodotti	IP	codice / code
ON/OFF	14W	350mA	38x25x79mm	1 ~ 10	67	9M201
DALI PUSH	16W	350mA	47x26x111mm	1 ~ 12	67	9M602/350