

GIOTTO MINI LO


322RA01L11



Descrizione del prodotto / Product description

Incasso LED per esterni.
Ideato per l'illuminazione uplight di facciate e architetture.
Corpo dissipante in alluminio tornito da pieno con trattamento superficiale di anodizzazione dura colore nero.
Ghiera esterna in Acciaio Inox AISI 316 L o Bronzo naturale.
Schermo superiore in vetro temperato extra-chiaro serigrafato (sp.4mm).
Lente interna ad emissione spot 15°, 30° o 60° in PMMA trasparente.
Multi-chip LED ad alta efficienza CRI ≥90.
Cavo di collegamento in neoprene.
Fornito con sistema di connessione rapido a due poli IP68 (vedi istruzioni di montaggio).

Recessed LED spot uplight.
Ideal for uplight lighting of facades and architectures.
Heat sink body made of turned aluminum.
External Ring made of Stainless Steel AISI 316 L or Natural Bronze.
Upper screen made of extra clear temperate glass (4mm thickness).
Spot optics 15°, 30° or 60° made of clear PMMA.
Multi-chip LED with high efficiency CRI ≥90.
Neoprene connection cable.
Supplied with rapid IP68 connector (see assembly instructions).

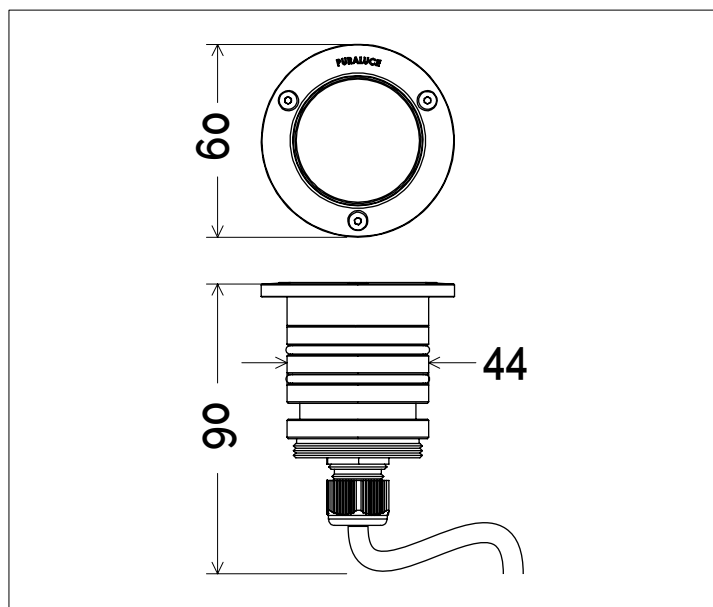

Dati tecnici | Technical Info

* su richiesta / on requests

Finiture Finishes	● 1002 Acciaio Inox AISI 316L Satinato Satin Stainless Steel AISI 316L
	● 1012 Bronzo Naturale Natural Bronze
Potenza Power	5W
Corrente Current	-
Tensione Voltage	24Vdc
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	618lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h
Temperature di esercizio Operating temperature	-20° ~ 45°

Simbologia tecnica Technical informations

CE	Conforme alle direttive CE
RoHS	Conforme alle normative RoHS
III	Classe III
IP67	Indice di Protezione IP67
Connettore stagno	in dotazione

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics


N4 -15° (Narrow Beam)
F1 -30° (Flood Beam)
W4 -60° (Wide Flood Beam)
W7 -120° (Very Wide Flood Beam)
E1 -15°x45° (Elliptical Beam)
A1- (Asimmetrica/ Asymmetrical)

Sistemi di Controllo Control System


On / Off (remoto escluso / remote excluded)
PUSH Push * (remoto escluso / remote excluded)
1-10V 1-10V, 0-10V * (remoto escluso / remote excluded)
DALI * (remoto escluso / remote excluded)

Creazione Codice | Code construction

322RA01L11-XXXX-XX-XXXX

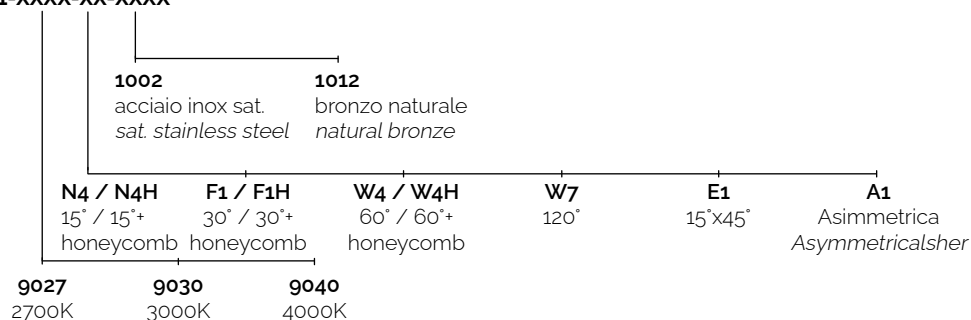


Dati Fotometrici | Photometric Specification

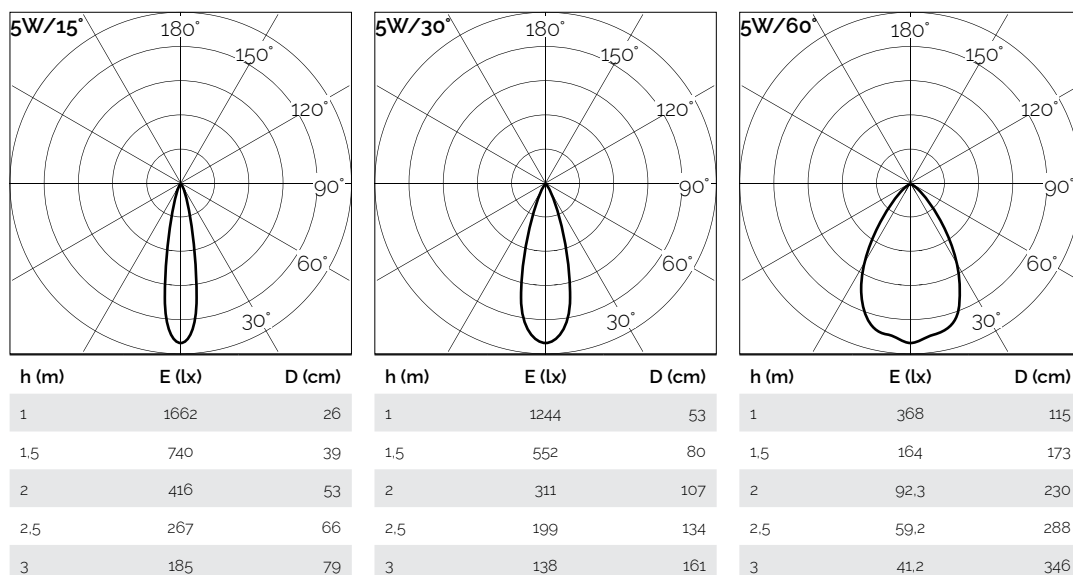

Accessori | Accessories


9A007



Cassaforma PVC.
(Ø80mm H.200mm)

PVC Ground Box.
(Ø80mm H.200mm)

Honeycomb/Honeycomb



Filtro Alveolare anti-abbaglia-
mento.
(spessore 3mm)

Anti-glare Honey Comb.
(thickness 3mm)

Alimentatori | *Led Driver*

Tipo Alim. / Driver Type	potenza / power	tensione / voltage	dimensioni / dimensions	n. prodotti	IP	codice / code
ON/OFF	14W	24Vdc	39x25x79mm	1 ~ 2	67	9M401
	36W	24Vdc	38x25x120mm	1 ~ 6	67	9M402
	75W	24Vdc	32x63x140mm	1 ~ 10	67	9M403
DALI	60W	24Vdc	35x53x150mm	1 ~ 10	67	9M805