

# PILZ UPLIGHT HI

311RA02H11



## Descrizione del prodotto / Product description

Incasso LED per esterno ad emissione spot.

Corpo interno dissipante in alluminio anodizzato, lente in PMMA trasparente vibrolucidato e flangia in Acciaio Inox AISI316L o bronzo naturale.

Ottica ad emissione spot.

Pressacavo posteriore IP68.

Power LED di potenza ad altissima efficienza CRI ≥90.

Cavo di collegamento in neoprene, fornito con sistema di connessione rapida termoretraibile (vedi istruzioni di montaggio).

Recessed spot LED.


Heat-sink made of anodized aluminium, clear PMMA optic, and upper flange made of Stainless Steel AISI316L or natural bronze.

Spot optic.

Rear co-printed cable gland IP68.

Power LED with very high efficiency CRI ≥90.

Neoprene cable connection cable Supplied with heat shrink fast connection system (see assembly instructions)

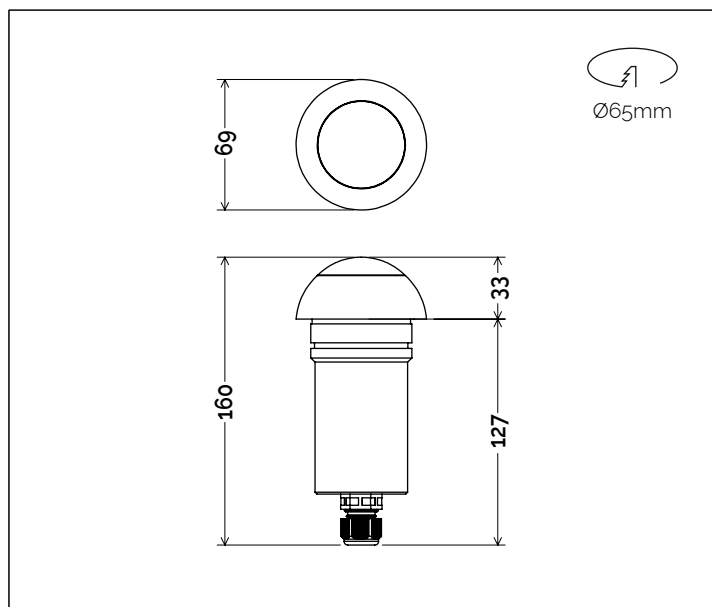

## Dati tecnici | Technical Info

\* su richiesta / on requests

Finiture   Finishes	● 1002 Acciaio Inox Satinato AISI316L   Satin Stainless Steel AISI316L
	● 1012 Bronzo Naturale   Natural Bronze
	● Verniciati RAL   RAL Paintings*
Potenza   Power	3W
Corrente   Current	-
Tensione   Voltage	220/240Vac
Tolleranza cromatica   Chromatic tolerance	3 SDCM
Flusso luminoso   Luminous Flux	236lm
Mantenimento del flusso lumi- noso   Flux Maintenance	≥50.000h
Temperature di esercizio   Ope- rating temperature	-20° ~ 45°

## Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHS
	Classe II
	Indice di Protezione IP65
	Connettore stagno in dotazione

## Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

## Ottiche Optics


	N1 -8° (Very Narrow Beam)
	N3 -12° (Narrow Beam)
	F1 -30° (Flood Beam)
	W1 -45° (Wide Flood Beam)
	E1 -15°x45° (Elliptical Beam)

## Sistemi di Controllo Control System


	On / Off (incluso / included)
	PUSH Push * (remoto escluso / remote excluded)
	1-10V 1-10V, 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)

## Creazione Codice | Code construction

311RA02H11-XXXX-XX-XXXX

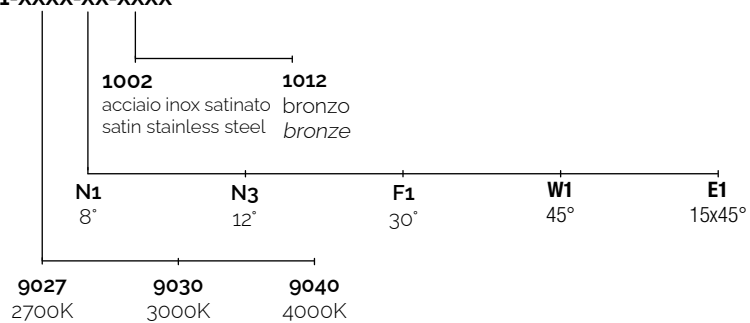


## Dati Fotometrici | Photometric Specification

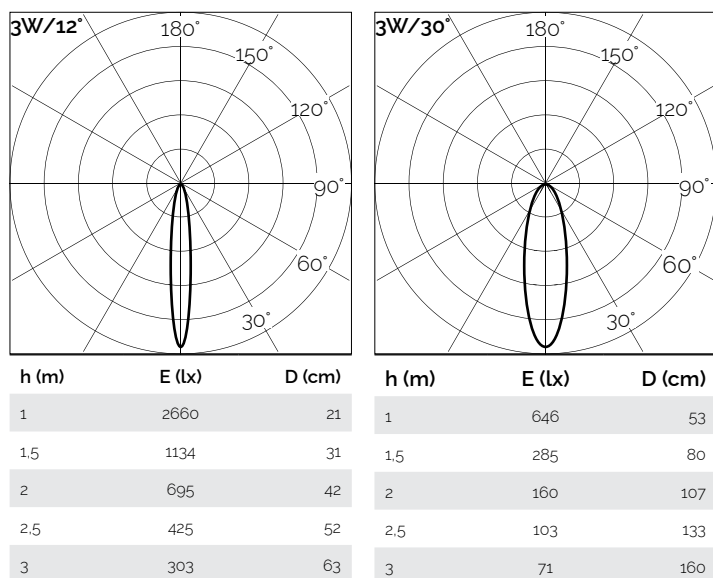

## Accessori | Accessories

9A022

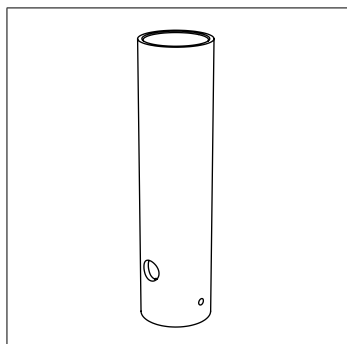

Cassaforma per incasso a terra  
(Ø63mm H.250mm)

Recessed Ground Box  
(Ø63mm H.250mm)