

# SFERA SOSP. TRACK 48Vdc (Ad. Bin. Curvo 01-06-13 Nero o Bianco)

**319BA11L11**  
**319BA12L11**



## Descrizione del prodotto / Product description

Sospensione LED da interno per binari elettrificati a bassa tensione.

Ideale per luce ambiente.

Corpo lampada in alluminio ricavato da taglio laser, Lente in PMMA trasparente con satinatura interna.

Ottica diffusa in PMMA trasparente.

Circuito Power LED di potenza con sorgente ad alta efficienza CRI ≥90.

Fornito con cavo di sospensione ultraflessibile e adattatore per binari in tensione costante "Stucchi".

Indoor pendant LED for low voltage track system.


Ideal for ambient light.

Lamp head made of laser cut aluminum and lens turned in clear PMMA.

Diffused optic made of clear PMMA.

Power LED circuit with very high efficiency CRI ≥90.

Supplied with flexible suspension cable and "Stucchi" constant voltage track adapter.

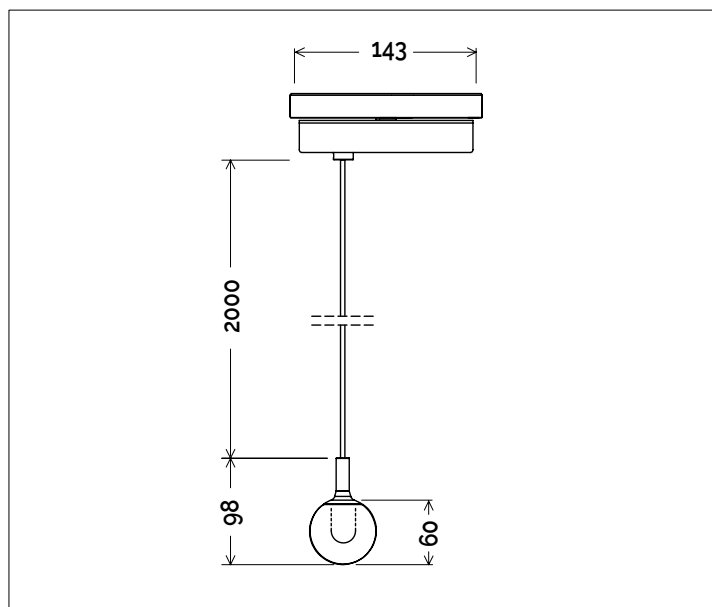

## Dati tecnici | Technical Info

\* su richiesta / on requests

### Finiture | Finishes

- **4001** Bianco | White
- **4002** Nero | Black
- **4010** Oro | Gold
- **4011** Bronzo | Bronze
- Verniciati RAL | RAL Paintings\*

Potenza   Power	6W
Corrente   Current	-
Tensione   Voltage	24 ~ 48Vdc
Tolleranza cromatica   Chromatic tolerance	3 SDCM
Flusso luminoso   Luminous Flux	690lm
Mantenimento del flusso luminoso   Flux Maintenance	≥50.000h
Temperature di esercizio   Operating temperature	-20° ~ 45°


## Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHs
	Classe III
<b>IP20</b>	Indice di Protezione IP20

## Temperatura di Colore Color Temperature

<b>9027</b> - 2700K CRI 92
<b>9030</b> - 3000K CRI 92
<b>9040</b> - 4000K CRI 92


## Ottiche Optics




## Sistemi di Controllo Control System

	<b>On / Off</b> (remoto escluso / remote excluded)
<b>PUSH</b>	<b>Push *</b> (remoto escluso / remote excluded)
	<b>DALI *</b> (remoto escluso / remote excluded)
	<b>Casambi Bluetooth *</b> (remoto escluso / remote excluded)

## Creazione Codice | Code construction

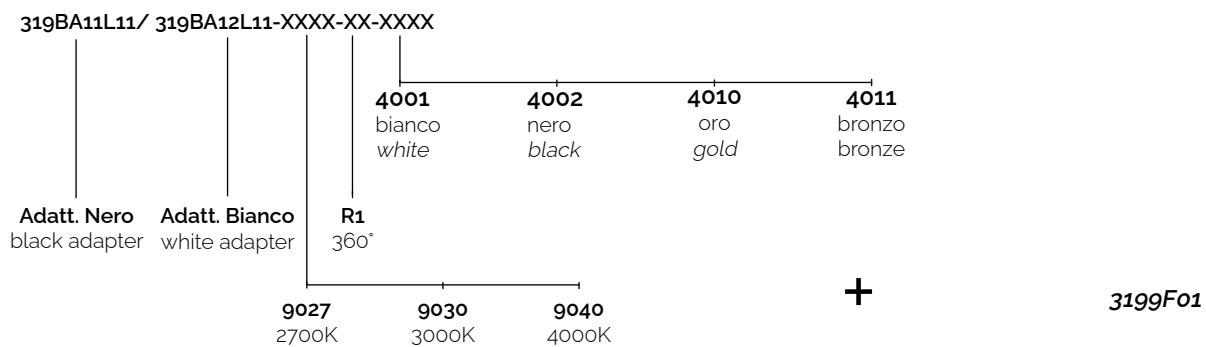


## Dati Fotometrici | Photometric Specification

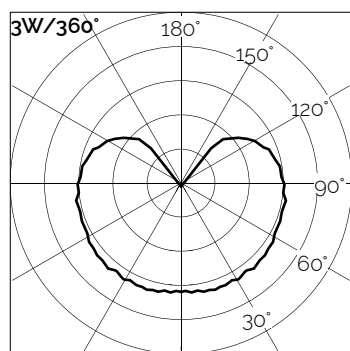

h (m)	E (lx)
0,25	535,5
0,5	173,5
1	41
1,5	17,2
2	8,4

## Accessori | Accessories

3199F01

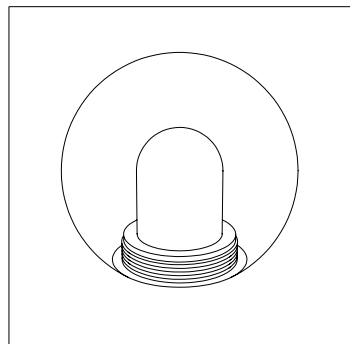

Opale Sfera

Opal Sphere