

ALPHA MAXI CC FISSAGGIO BASE /CANOPY FIXING

340PD02C11



Descrizione del prodotto / Product description

Proiettore LED direzionabile da interno con rosone per fissaggio a soffitto.

Ideale per l'illuminazione d'accento.

Corpo lampada realizzati in alluminio tornito con verniciatura a polvere epossidica.

Snodo in ottone tornito e base in ferro verniciato.

Disponibili varie ottiche in PMMA trasparente.

Anello frontale antiglare in alluminio anodizzato nero con finitura personalizzabile a richiesta.

Sorgente COB LED con LES ridotta.

Fornito con connettore a due poli IP20

(vedi istruzioni di montaggio).

Adjustable LED projector for indoor with fixing base.

Ideal for accent light.

Lamp body made of turning aluminum with painted finish.


Brass joint made of painted brass and base made of painted steel.

Various available spot optics made of clear PMMA.

Anti-glare ring made of black anodized aluminum.

COB LED source with LES reduced.

Supplied with IP20 connector (see assembly instructions).

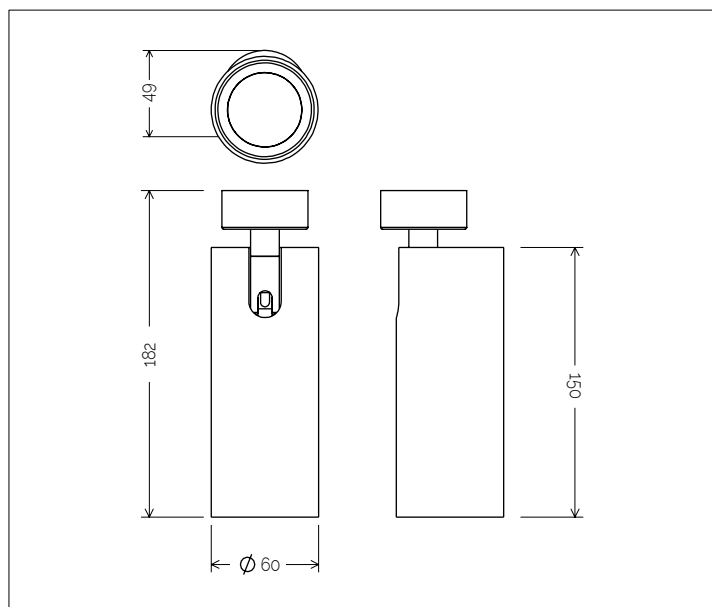

Dati tecnici | Technical Info

* su richiesta / on requests

Finiture | Finishes

- 4010 Oro | Gold
- 4011 Bronzo | Bronze
- 4051 Bianco Txt | White Textured
- 4052 Nero Txt | Black Textured
- Verniciati RAL | RAL Paintings*

Potenza | Power Max 25W

Corrente | Current 350mA-700mA

Tensione | Voltage 36Vdc

Tolleranza cromatica | Chromatic tolerance 3 SDCM

Flusso luminoso | Luminous Flux 2980lm

Mantenimento del flusso luminoso | Flux Maintenance ≥50.000h

Temperature di esercizio | Operating temperature -20° ~ 45°

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHs
	Classe III
	Indice di Protezione IP40

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics


	N4 - 15° (Narrow Beam)
	F1 - 30° (Flood Beam)
	W4 - 60° (Wide Flood Beam)

Sistemi di Controllo Control System

	On / Off (remoto escluso / remote excluded)
	Push * (remoto escluso / remote excluded)
	1-10V (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)


Creazione Codice | Code construction

340PD02C11-XXXX-XXXX

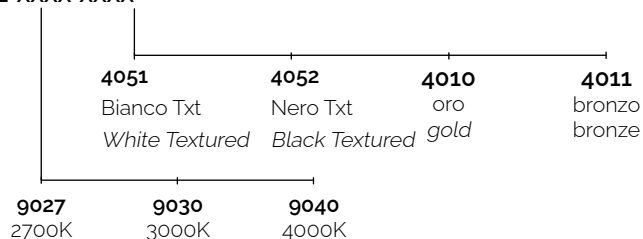


+

gFoo8-XX-XXXX

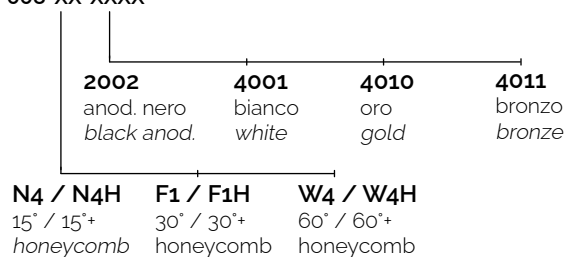

Accessori | Accessories


gFoo8-XX-XXXX



Ottica + Anello riflettore

Optic + Lock ring

gFoo8-XXX-XXXX



Ottica + Anello riflettore+
honeycomb

Optic + Lock ring+ honeycomb