PURALUCE
tuscany light

BOOMER 25 TRACK 230V (Ad. Bin. Trifase Nero o Bianco)


341BB01H11
341BB02H11



Descrizione del prodotto / *Product description*

Proiettore LED da interno con fissaggio a binario o plafone.
Ideale per l'illuminazione d'accento.
Corpo realizzato da tornitura di alluminio con trattamento superficiale di verniciatura o galvanica rame.
Disponibili varie ottiche e schermo in PMMA trasparente serigrafato.
Sorgente COB LED ad alta resa ed alimentatore ON/OFF a bordo. Fornito con adattatore per binari a 230Vac ".

LED projector for indoor with track or ceiling system.
Ideal for accent light.
Body made of turning aluminum with painted or copper finish.
Various available spot optics and silk-screened screen made of clear PMMA.
COB LED source with ON/OFF driver on-board.
Supplied with 230Vac track adapter.

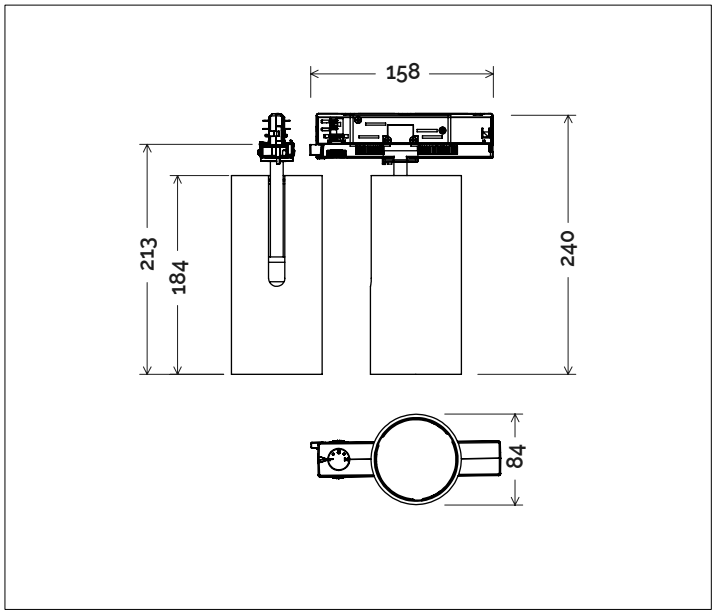

Dati tecnici | *Technical Info*

* su richiesta / on requests

Finiture | *Finishes*	**4001** Bianco | *White* **4002** Nero | *Black* **4010** Oro | *Gold* **4011** Bronzo | *Bronze* Verniciati RAL | *RAL Paintings**
Potenza | *Power*	25W
Corrente | *Current*	-
Tensione | *Voltage*	220/240Vac
Tolleranza cromatica | *Chromatic tollerance*	3 SDCM
Flusso luminoso | *Luminous Flux*	2900lm
Mantenimento del flusso luminoso | *Flux Maintenance*	≥50.000h
Temperature di esercizio | *Operating temperature*	-20° ~ 45°

Simbologia tecnica *Technical informations*

- Conforme alle direttive CE
- Conforme alle normative RoHs
- Classe I
- IP20 — Indice di Protezione IP20

Temperatura di Colore *Color Temperature*

- **9027** - 2700K CRI 92
- **9030** - 3000K CRI 92
- **9040** - 4000K CRI 92

Ottiche *Optics*

- **M1** - 20° (Medium Beam)
- **F1** - 30° (Flood Beam)
- **W3** - 50° (Wide Flood Beam)
- **W5** -75°(Very Wide Flood Beam)

Sistemi di Controllo *Control System*

- **On / Off** (a bordo / on board)
- **DALI / Push** * (a bordo / on board)
- 1-10V — **1-10V , 0-10V** * (a bordo / on board)
- **Casambi Bluetooth** * (a bordo / on board)

Creazione Codice | *Code construction*


341BB01H11 /341BB02H11-XXXX-XX-XXXX

4001 bianco *white*
4002 nero *black*
4010 oro *gold*
4011 bronzo *bronze*


Adatt. Nero black adapter
Adatt. Bianco white adapter
M1 / M1H 20° / 20°+ honeycomb
F1 / F1H 30° / 30°+ honeycomb
W3 / W3H 50° / 50°+ honeycomb
W5 / W5H 75° / 75°+ honeycomb

9027 2700K
9030 3000K
9040 4000K


Dati Fotometrici | *Photometric Specification*

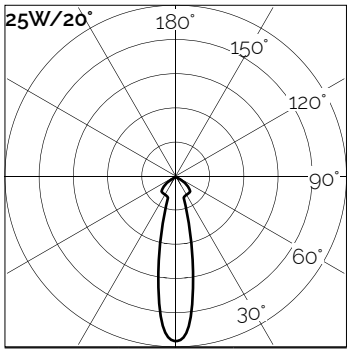


h (m)	E (lx)	D (m)
1	15640	38
1,5	7210	58
2	4390	77
2,5	2530	97
3	1820	116

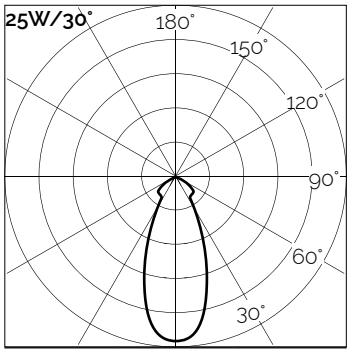

h (m)	E (lx)	D (m)
1	5685	65
1,5	2575	97
2	1436	130
2,5	953	162
3	676	195

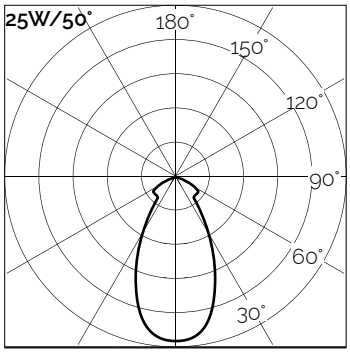


h (m)	E (lx)	D (m)
1	2683	104
1,5	1232	156
2	684	208
2,5	455	260
3	333	312

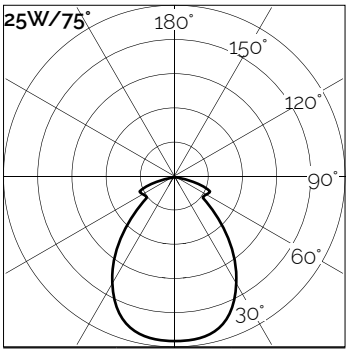

h (m)	E (lx)	D (m)
1	1563	148
1,5	793	221
2	455	296
2,5	305	369
3	226	443

Accessori | *Accessories*

Honeycomb / *Honeycomb*

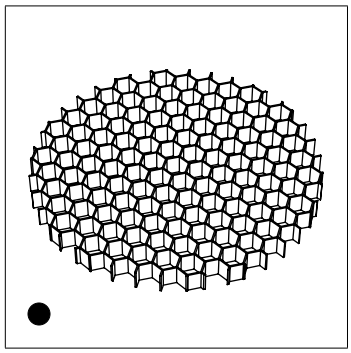

Filtro Alveolare anti-abbaglia-mento.
(spessore 3mm)

Anti-glare Honey Comb.
(thickness 3mm)