PURALUCE
tuscany light

ALPHA MAXI Track 48Vdc (Ad. Curvo Bin. 01-06-13 Nero o Bianco) 340BD17L11 340BD18L11




Descrizione del prodotto / *Product description*

Proiettore LED direzionabile da interno per binari elettrificati a bassa tensione 48Vdc.
Ideale per l'illuminazione d'accento.
Corpo realizzato da tornitura di alluminio verniciato.
Disponibili varie ottiche in PMMA trasparente.
Anello frontale antiglare in alluminio anodizzato nero con finitura personalizzabile a richiesta.
Sorgente COB LED con LES ridotta.
Fornito con adattatore per binari in tensione costante "Stucchi".

Adjustable LED projector for indoor for track or ceiling system. Ideal for accent light.
Body made of turning aluminum with painted finish.
Spot optics made of clear PMMA and anti-glare ring made of anodized aluminum with customizable finish.COB LED source with LES reduced.

COB LED source with LES reduced.
Supplied with "Stucchi" constant voltage track adapter.

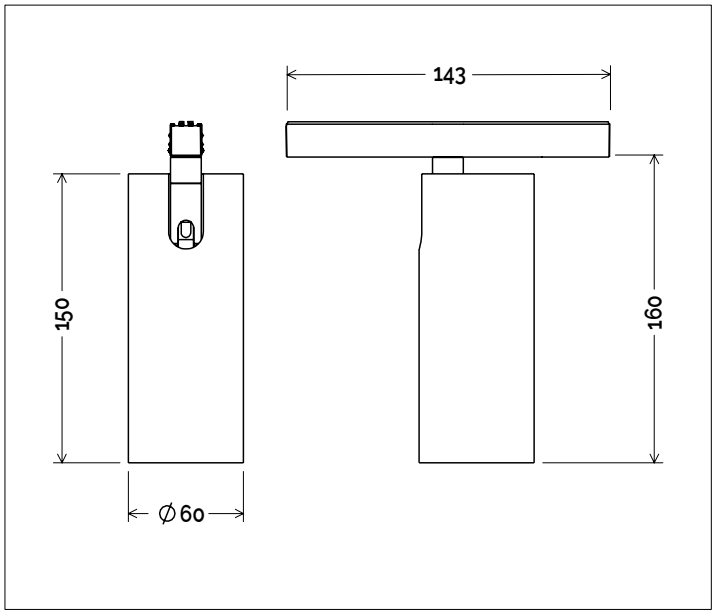

Dati tecnici | *Technical Info*

* su richiesta / on requests

Finiture	*Finishes*	**4010** Oro | *Gold* **4011** Bronzo | *Bronze* **4051** Bianco Txt | White Textured **4052** Nero Txt | Black Textured Verniciati RAL | *RAL Paintings**
Potenza | *Power*	25W
Corrente | *Current*	-
Tensione | *Voltage*	48Vdc
Tolleranza cromatica | *Chromatic tollerance*	3 SDCM
Flusso luminoso | *Luminous Flux*	2961lm
Mantenimento del flusso luminoso | *Flux Maintenance*	≥50.000h
Temperature di esercizio | *Operating temperature*	-20° ~ 45°

Simbologia tecnica *Technical informations*

- Conforme alle direttive CE
- Conforme alle normative RoHs
- Classe III
- IP20 — Indice di Protezione IP20

Temperatura di Colore *Color Temperature*

- **9027** - 2700K CRI 92
- **9030** - 3000K CRI 92
- **9040** - 4000K CRI 92

Ottiche *Optics*

- **N4** -15° (Narrow Beam)
- **F1** - 30° (Flood Beam)
- **W4** -60° (Wide Flood Beam)

Sistemi di Controllo *Control System*

- **On / Off** (a bordo / on board)
- **DALI / Push** * (a bordo / on board)
- **1-10V , 0-10V** * (a bordo / on board)
- **Casambi Bluetooth** * (a bordo / on board)

Creazione Codice | *Code construction*

340BD17L11/ 340BD18L11-XXXX-XX-XXXX


- **Adatt. Nero** black adapter
- **Adatt. Bianco** white adapter
- **N4** 15°
- **F1** 30°
- **W4** 60°
- **4051** Bianco Txt *White Textured*
- **4052** Nero Txt *Black Textured*
- **4010** oro *gold*
- **4011** bronzo bronze
- **9027** 2700K
- **9030** 3000K
- **9040** 4000K

9F008-XX-XXXX

- **N4 / N4H** 15° / 15°+ *honeycomb*
- **F1 / F1H** 30° / 30°+ honeycomb
- **W4 / W4H** 60° / 60°+ honeycomb
- **2002** anod. nero *black anod.*
- **4001** bianco *white*
- **4010** oro *gold*
- **4011** bronzo *bronze*

Accessori | *Accessories*


9F008-XX-XXXX

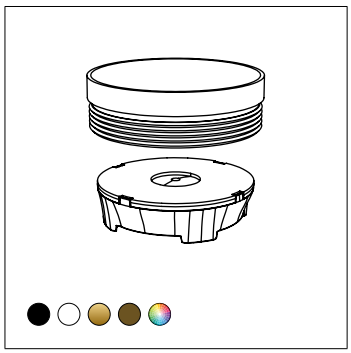

Ottica + Anello riflettore

Optic + Lock ring

9F008-XXX-XXXX

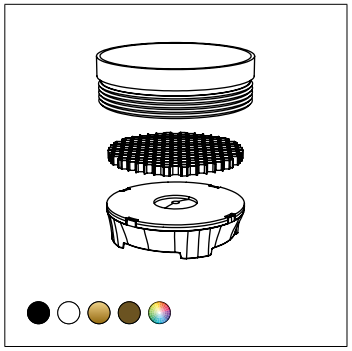

Ottica + Anello riflettore+ honeycomb

Optic + Lock ring+ honeycomb