

BOOMER 14 PLAFONE


341PA01H11



Descrizione del prodotto / Product description

Proiettore LED da interno con fissaggio a plafone. Ideale per l'illuminazione d'accento. Corpo realizzato da tornitura di alluminio con trattamento superficiale di verniciatura o galvanica rame. Ottica ad emissione spot e schermo in PMMA trasparente serigrafato. Sorgente COB LED ad alta resa ed alimentatore ON/OFF a bordo.

LED projector for indoor with ceiling box system. Ideal for accent light. Body made of turning aluminum with painted or copper finish. Spot optics and silk-screened screen made of clear PMMA. COB LED source with ON/OFF driver on-board.

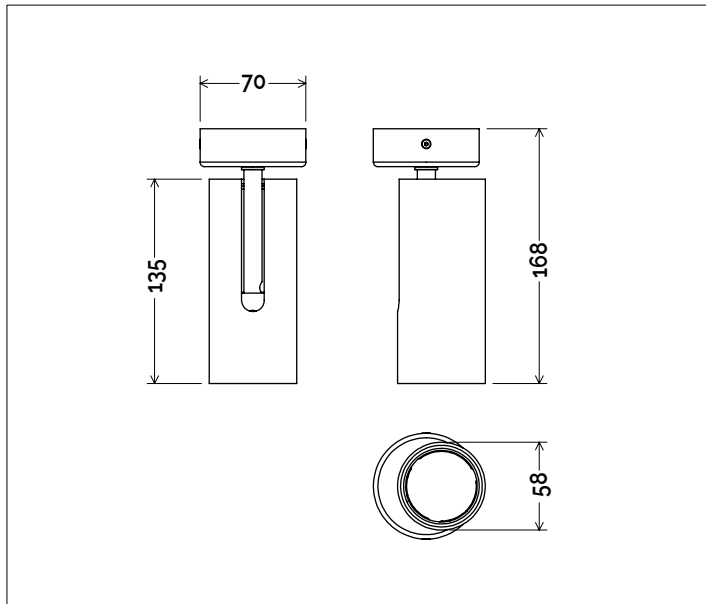

Dati tecnici | Technical Info

* su richiesta / on requests

Finiture Finishes	<input type="radio"/> 4001 Bianco White <input checked="" type="radio"/> 4002 Nero Black <input type="radio"/> 4010 Oro Gold <input type="radio"/> 4011 Bronzo Bronze <input type="radio"/> Verniciati RAL RAL Paintings*
Potenza Power	14W
Corrente Current	-
Tensione Voltage	220/240Vac
Tolleranza cromatica Chromatic tolerance	3 SDCM
Flusso luminoso Luminous Flux	1500lm
Mantenimento del flusso luminoso Flux Maintenance	≥50.000h
Temperature di esercizio Operating temperature	-20° ~ 45°

Simbologia tecnica Technical informations

	Conforme alle direttive CE
	Conforme alle normative RoHs
	Classe I
IP20	Indice di Protezione IP20

Temperatura di Colore Color Temperature

9027 - 2700K CRI 92
9030 - 3000K CRI 92
9040 - 4000K CRI 92

Ottiche Optics


	M1 -20° (Medium Beam)
	F1 -30° (Flood Beam)
	W3 -50° (Wide Flood Beam)

Sistemi di Controllo Control System


	On / Off (a bordo / on board)
PUSH	Push * (remoto escluso / remote excluded)
1-10V	1-10V, 0-10V * (remoto escluso / remote excluded)
	DALI * (remoto escluso / remote excluded)

Creazione Codice | Code construction

341PA01H11-XXXX-XX-XXXX

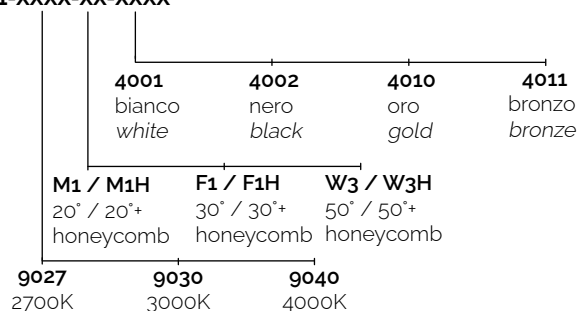


Dati Fotometrici | Photometric Specification

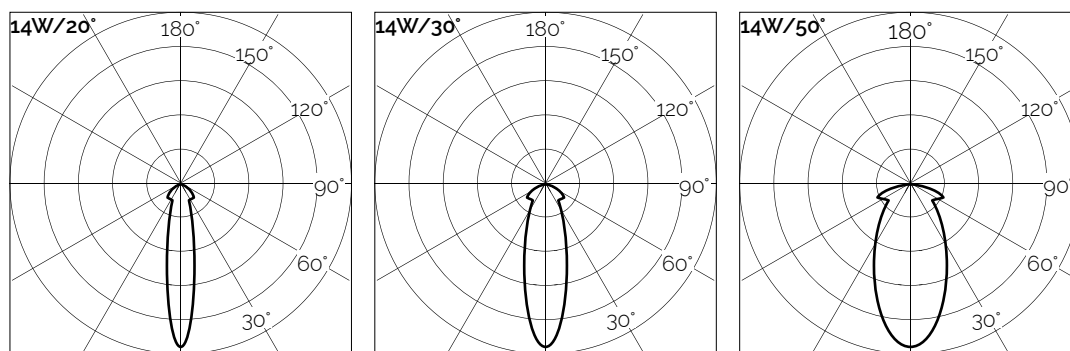

h (m)	E (lx)	D (cm)	h (m)	E (lx)	D (cm)	h (m)	E (lx)	D (cm)
1	3613	28	1	2504	46	1	2041	82
1.5	1492	42	1.5	1029	69	1.5	836	124
2	810	56	2	557	92	2	453	165
2.5	508	70	2.5	349	115	2.5	284	207
3	348	85	3	240	138	3	194	248

Accessori | Accessories

Honeycomb / Honeycomb



Filtro Alveolare anti-abbagliamento.
(spessore 3mm)

Anti-glare Honey Comb.
(thickness 3mm)